

Fig. 1A

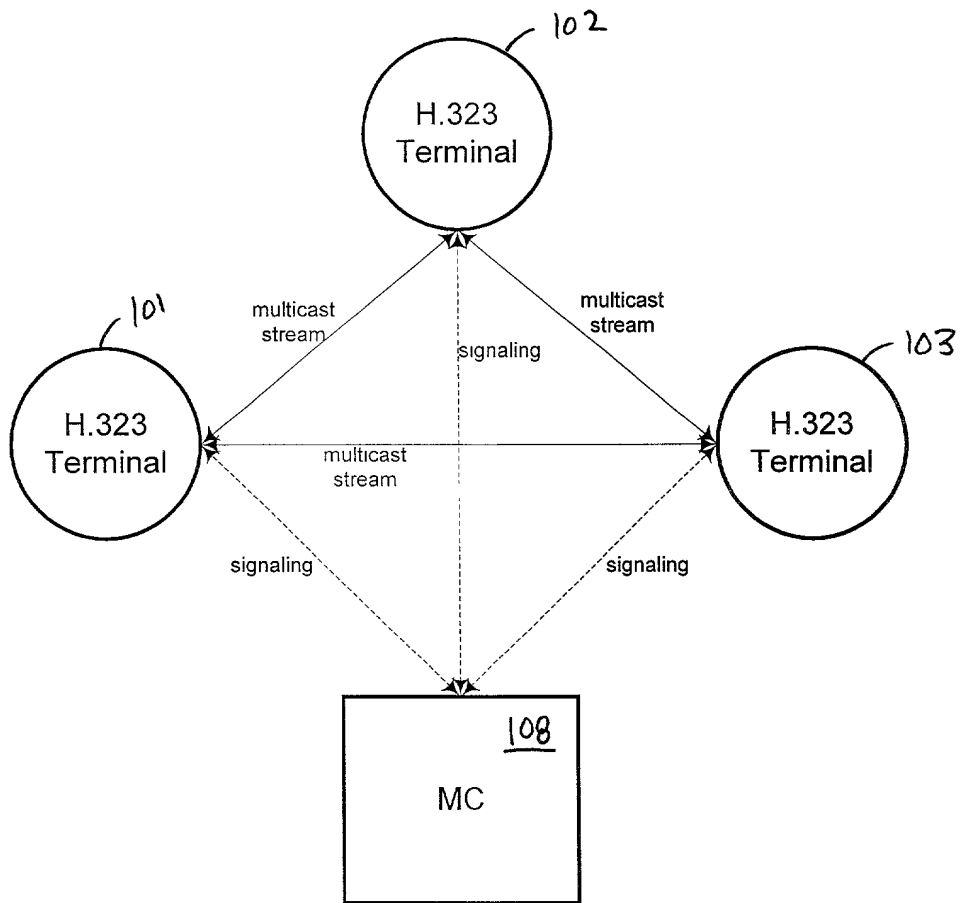


Fig. 1B

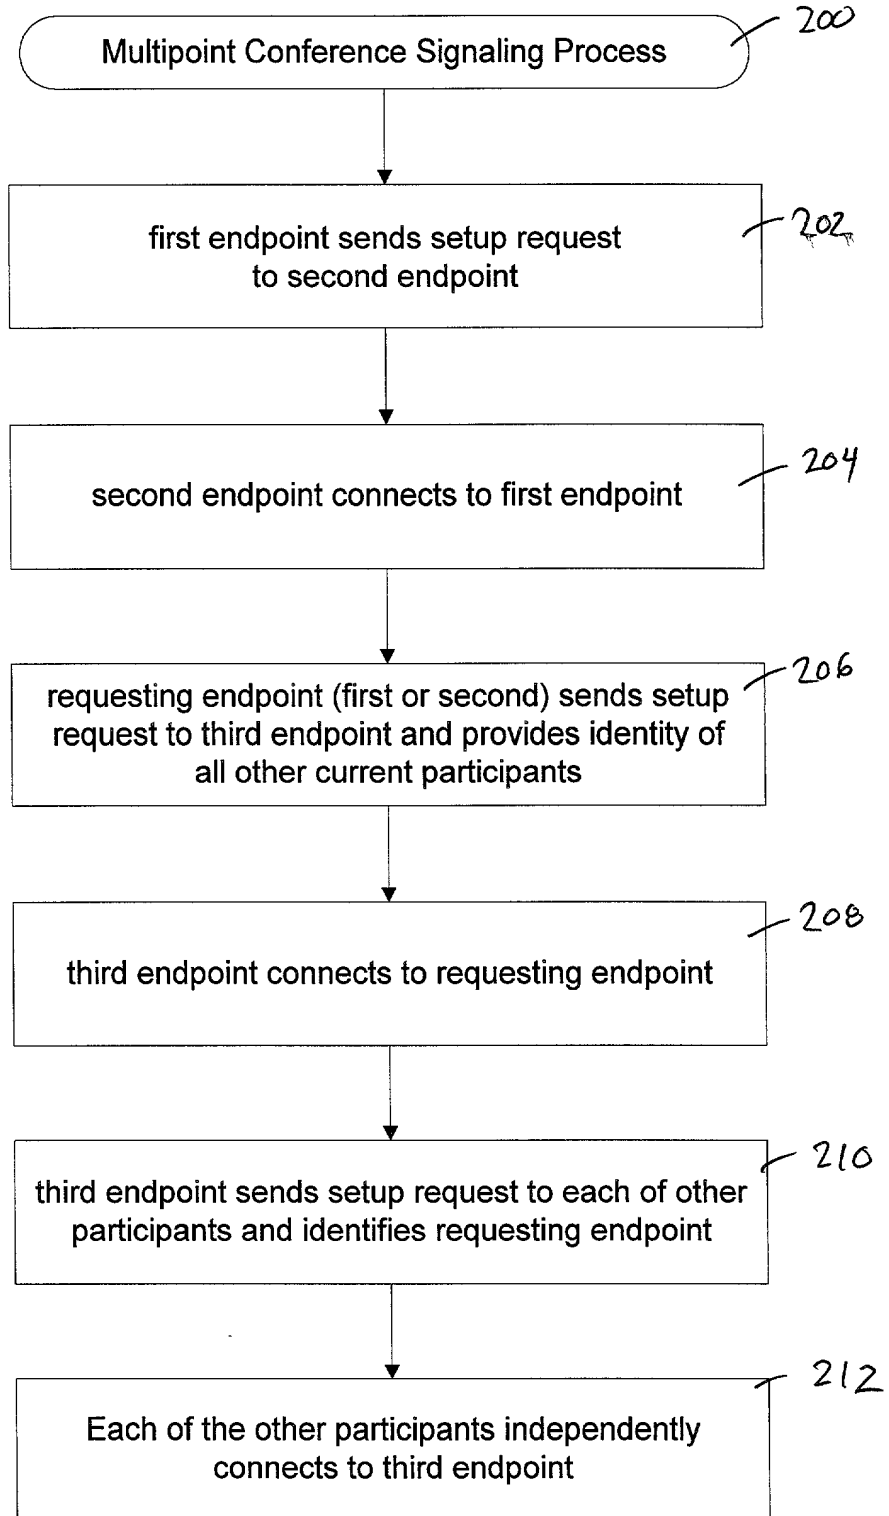


Fig. 2

3002 H323-UU-PDU::=SEQUENCE

h323-message-body CHOICE

{
 setup
 callProceeding
 connect
 alerting
 information
 releaseComplete
 facility
 progress
 empty
 Setup-UIUE,
 CallProceeding-UIUE,
 Connect-UIUE,
 Alerting-UIUE,
 Information-UIUE,
 ReleaseComplete-UIUE,
 Facility-UIUE,
 Progress-UIUE,
 NULL
 --used when a FACILITY message is sent,
 --but the Facility-UIUE is not to be invoked
 --(possible when transporting supplementary
 -- services messages)
}

305 NonStandardData

h4501SupplementaryService
 SEQUENCE OF OCTET STRING OPTIONAL
 --each sequence of octet string is defined as one
 --h4501SupplementaryService APDU as defined
 --in Table 3/H.450.1

h245Tunneling
 BOOLEAN
 --if TRUE, tunneling of H.245 messages is enabled

h245Control
 SEQUENCE OF OCTET STRING OPTIONAL
 --each octet string may contain exactly
 --one H.245 PDU

nonStandardControl
 SEQUENCE OF NonStandardParameter OPTIONAL

308 NonStandardParameter::=SEQUENCE

{
 310 NonStandardIdentifier
 312 data
}

NonStandardIdentifier
{
 316 Object
 318 h221NonStandard
}

Object IDENTIFIER,
h221NonStandard,

::=CHOICE

OBJECT IDENTIFIER,
h221NonStandard,

AliasAddress::=CHOICE

{
 324 e164
 h323-ID
 url-ID
 transportID
 email-ID
 partyNumber
 partyNumber PartyNumber
 IA5String (SIZE(1..128))(FROM ("0123456789No.*"),
 BMPString (SIZE(1..256)),
 IA5String (SIZE(1..512)),
 TransportAddress
 IA5String (SIZE(1..512)),
 --URL style address
 --rfc822-complaint email address
}

Fig. 3A

Fig. 3B

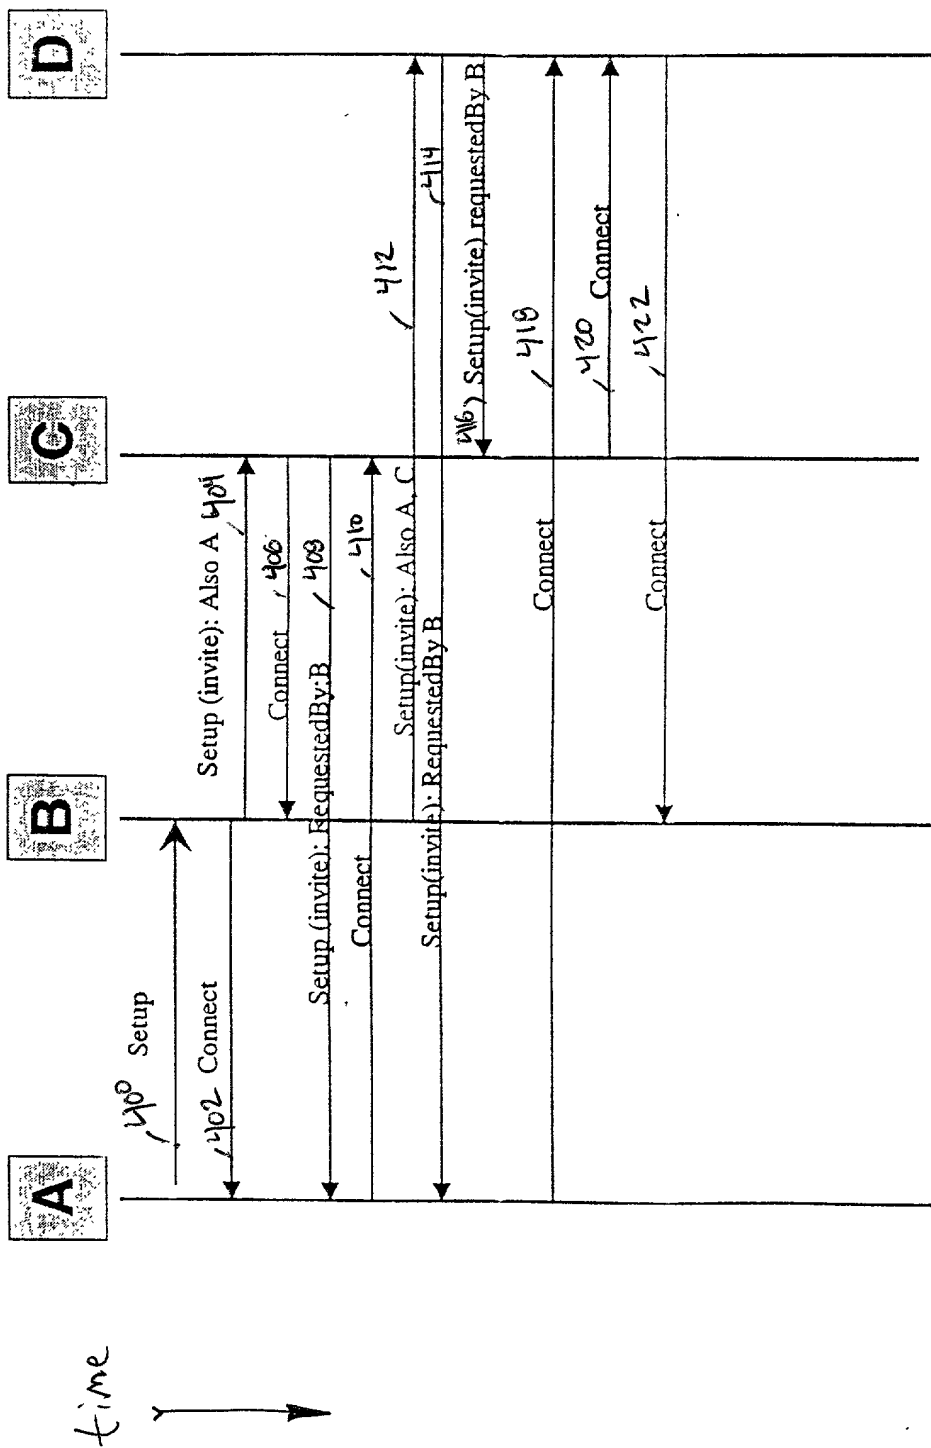


Fig. 4